


D-Link®

Building Networks for People

Setup Guide for the DSL-224

Step 1: Open your Internet browser (ex. Internet Explorer, Mozilla, Google Chrome, Safari) and type in the Router's IP address in the address bar and press enter. (Default IP 10.0.0.2).

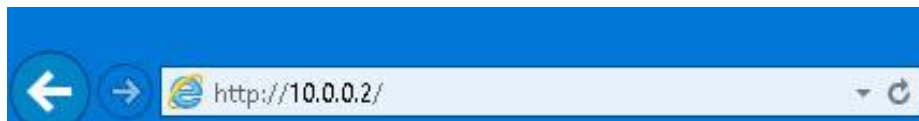


Step 2: Type in the User Account Credentials for the router. By default the Username is: admin and the Password is: admin




Authorization Failed

Without a valid username and password, access to this page cannot be granted. Please click reload and enter a username and password when prompted.

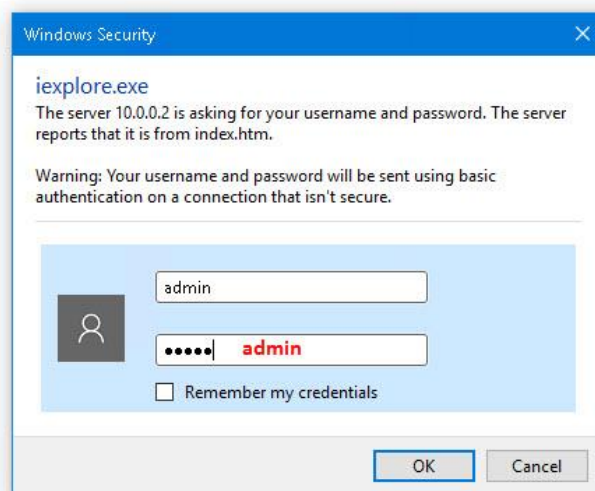

Step 3: Click on Internet setup, Channel Config. Scroll down to the "Current WAN Table" and select the second entry.

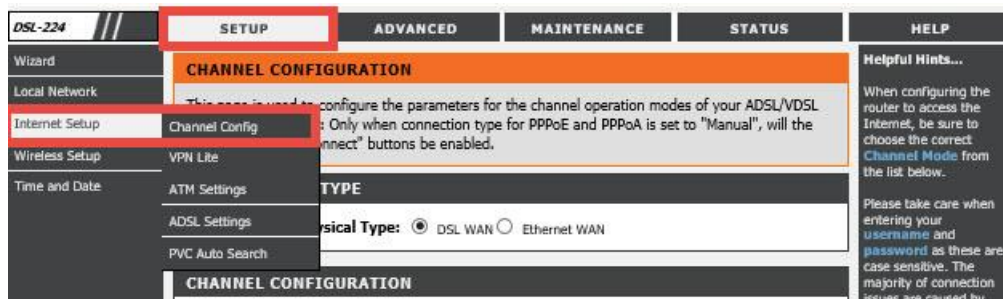





D-Link®

Building Networks for People

Setup Guide for the DSL-224

CURRENT WAN TABLE:

Select	Inf	Mode	VPI	VCI	Encap	NAPT	IGMP	Firewall	DRoute	User Name	Status	Edit
<input type="radio"/>	pppoe1	PPPoE	8	35	LLC	On	Off	On	On	guest@telkomadsl	Down	 
<input checked="" type="radio"/>	pppoe2	PPPoE	-	-	-	On	Off	On	On	guest@telkomadsl	Down	 

Step 4: Scroll up to the Current Configuration, and edit the PPP settings Username and Password with the details provided by the ISP.

- **Channel Type:** PTM
- **Channel mode:** PPPoE
- **Enable NAPT:** Enabled by default
- **Enable Firewall:** Enabled by default
- **802.1q:** Enable
- **VLAN ID:** 835
- **IP Protocol:** IPV4
- **PPP setting Username and Password.** (Default is guest@telkomadsl and guest).

CHANNEL CONFIGURATION

Channel Type:

Channel Mode: Enable NAPT: Enable IGMP:

Enable Firewall:

802.1q: Disable Enable VLAN ID(1-4095):

IP Protocol:

PPP Settings: Username: Password:

Type: Idle Time (min):

WAN IP Settings: Type: Fixed IP/IP Unnumbered DHCP

Local IP Address: Remote IP Address:

Netmask:

Default Route: Disable Enable Auto

Unnumbered



Setup Guide for the DSL-224

Step 5: Click on modify to apply the new settings.

